


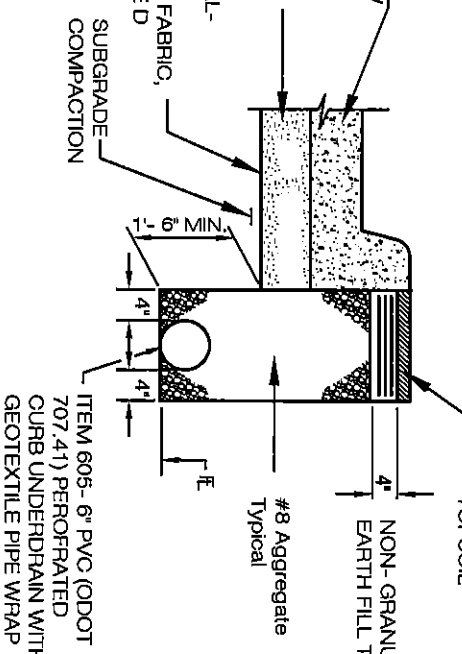


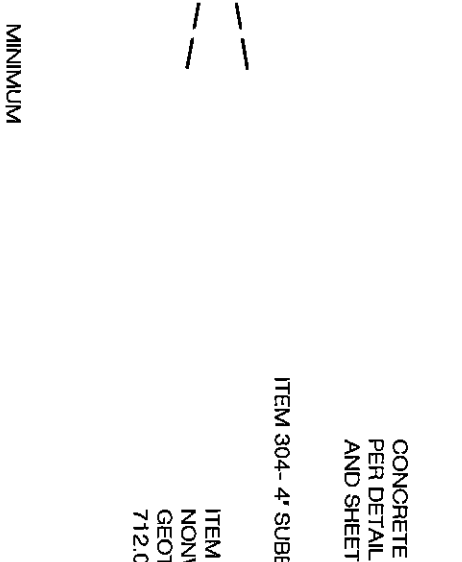

WM
(5' STD. COVER)

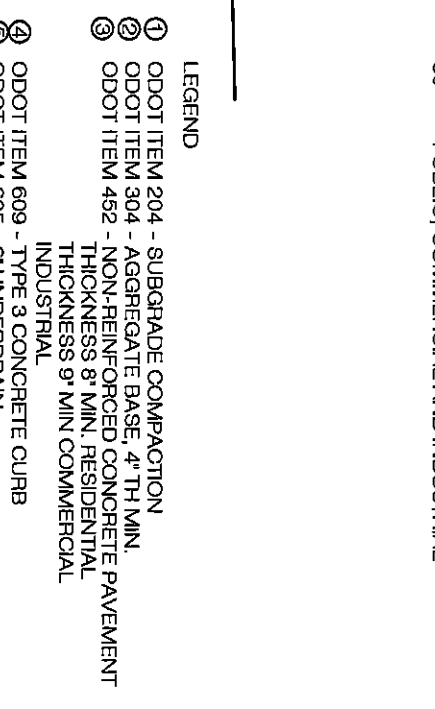

⑥ ODOT IT

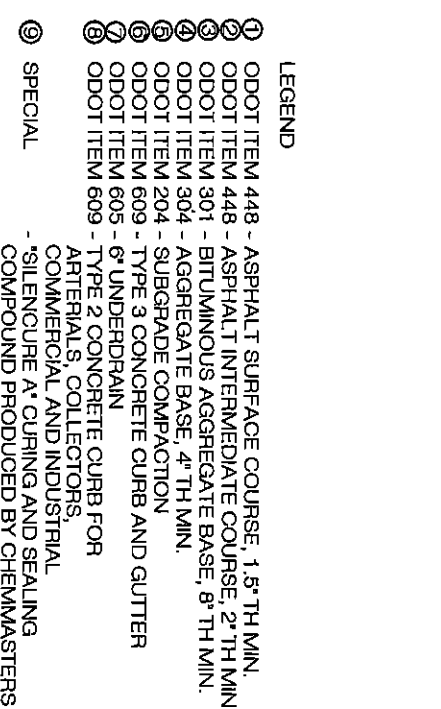


WITH FABRIC WRAP

4"	NORMAL SIDEWALK
6"	RESIDENTIAL DRIVES
8"	COMMERCIAL AND INDUSTRIAL DRIVES

SIDEWALK MINIMUM WIDTHS (W_S)

3.5'	R/W LESS THAN 50' WIDE
4.0'	R/W WIDTH 50' TO 60' WIDE
5.0'	R/W EXCEEDS 60'

STONE BASE SHALL CONSIST OF ODOT #57
67, 8, 304, 310 OR OTHER ENGINEERED FILL
AS APPROVED BY THE CITY ENGINEER

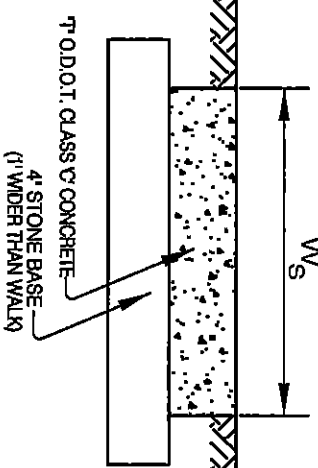

SIDEWALK DETAIL

2	9/29/09	CB	UNDERDRAP SIZE
1	5/11/09	CB	CURING COMPOUND
REV No.	DATE	BY	DESCRIPTION

CITY OF NORTH RIDGEVILLE, OHIO
DEPARTMENT OF ENGINEERING

PAVEMENT & RIGHT-OF-WAY STANDARDS

SCALE: NOT TO SCALE

DATE: 10/01/08	DRWN BY: JAB/TEE
----------------	------------------

PAV-1

www.CHEMMASTERS.NET

David J. Maffett

CITY OF NORTH RIDGEVILLE, ENGINEER

CITY OF NORTH RIDGEVILLE, ENGINEER